

5MP AI Starlight 40M Outdoor Dual Light IP Camera



Alcon Quad HD Dual Light Bullet Camera

The Alcon AL-5001-MPC-HD5CMDK-GS Fixed Lens IP Camera with IR Illuminator provide high-resolution images for round-the-clock surveillance over IP networks & color picture in dark conditions. It supports up to H.265 compression formats and delivers excellent picture quality in 2880x1620 resolutions. IR-Cut filter and built-in IR illuminators support up to 40MTR IR distance. It supports Power-Over-Ethernet. It is an ideal solution for indoor surveillance applications such as school, college, hospital, training center, restaurant, conference hall etc.

Key features

- 5MP (2880x1620)
- H.265/H.264 video encode
- Min. illumination Color: 0.005Lux@F1.6
- Full Metal, IP66
- Smart IR, IR Range: 40m
- Built-in-Mic
- AI Human & Vehicle Classification, Cross line detection
- Working Temperature $-40^{\circ}\text{C} \sim 60^{\circ}\text{C}$ (-40°F to 140°F)

Application



Hospital



School/ College



Office



Apartment




SPECIFICATION

Model		AL-5001-MPC-HD5CMDK-GS
Camera	Image	1/2.8" CMOS
	Min. Illumination	Color: 0.005Lux@F1.6; B/W: 0Lux with LED on
	Lens	3.6mm(2.8mm/6mm available)
	Electronic Shutter	AUTO, 1/25s ~ 1/100000s
	LED Type	Dual Light
	LED Distance	Up to 40m
	Day/Night	Day/Night/Auto/Customize/Schedule
Video	Max.Image Resolution	5 Mega Pixel
	Main Stream	5MP(2880*1620)/4MP(2560*1440)/2MP(1920*1080)/720P
	Sub Stream	448P(800*448)/D1(704*576)/360P(640*360)/ CIF(352*288)
	Video Compression	H.265/H.264 video encode
Audio	Audio Standard	G.711-u/G.711-a
	Built-in Mic	Yes
	Built-in Speaker	N/A
Interface	TF Card Slot	N/A
	POE Port	RJ45 100mbps Network Port, IEEE802.3af PoE
	Power Connector	DC12V (Spare)
Network	Network Storage	NFS /NAS /FTP(Photo)
	Protocol	ONVIF, P2P, CGI, HTTP, TCP/IP, IPv4, RTSP, UDP, NTP, DHCP, DNS
	P2P Cloud Service	Yes
System	Local Storage	N/A
	Motion Detection	Yes
	Event Trigger Event Action	FTP Upload(Only Photo), SMTP Upload, SD Card Record,Alarm Server Center Upload
	Intelligent Analysis	Electronic fence,Cross-boundary,human and vehicle detection
	Web Client Language	English, Russian, German, Italian,Turkish, Polish, Korean,Japanese,Portuguese, etc.
General	Protection Level	Full Metal, IP66
	Working Temperature	-40°C~60°C (-40 °F to 140 °F)
	Humidity Power Supply	0~95%(Non-condensing)



DIMENSIONS

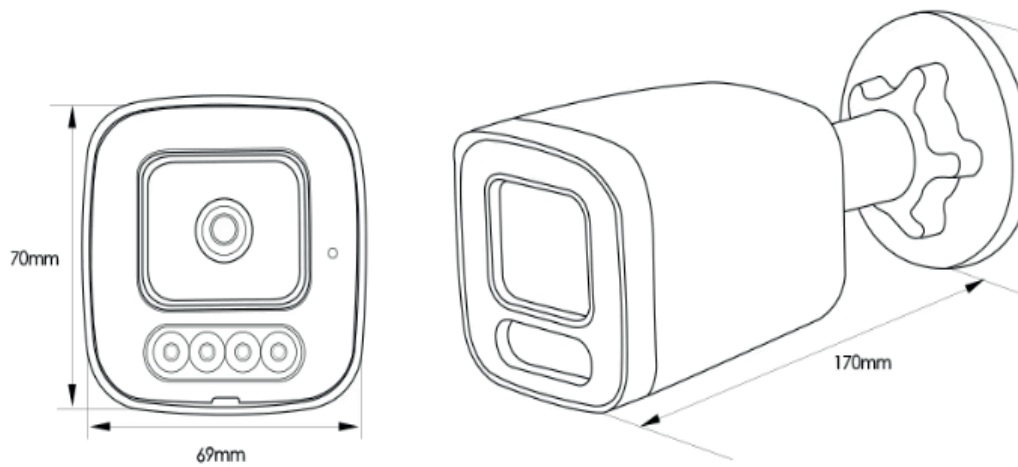

ORDERING INFORMATION

AL-5001-MPC-HD5CMDK-GS

5MP AI 40M IR BULLET CAMERA



*Product specifications and availability are subject to change without notice.

