


Data Sheet

AL-NVR5032-4D

# 32CH SMART NETWORK VIDEO RECORDER

## 32CH 4SATA SMART NVR

- Up to 32-ch Input
- Bandwidth 208Mbps
- Support up to 8MP resolution
- ONVIF (PROFILE S/T/G), SDK, P2P
- 4 SATA interface for 4 HDDs
- Up to 10TB for each HDD
- HDMI and VGA output
- 2xRJ45 10/100/1000 Mbps network interface
- VCA: Tripwire; Double Tripwire; Perimeter; Object Abandon; Object Missing; Loiter; Running; Parking; Heatmap; Video Abnormal; Audio Abnormal; On Duty Detection; Crowd Detection; Safety Helmet Detection; People Counting; Link to Tracking; Smoke and Fire Detection; Environmental Temperature Measurement; Face Detection; Human Body Temperature Measurement; Smart Motion; Human/Vehicle Classification Heatmap; Early-warning

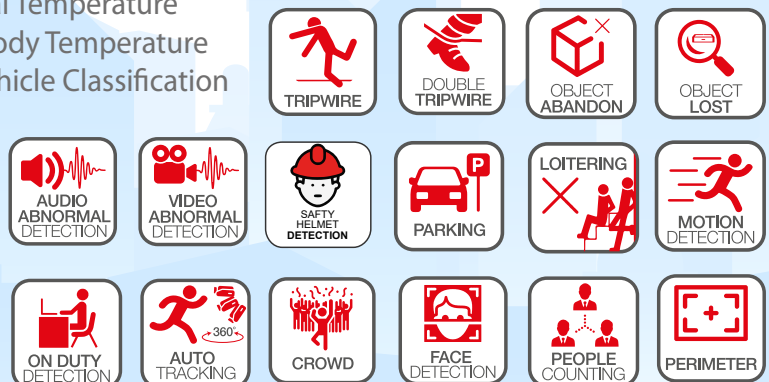

## 32CH 4K NETWORK VIDEO RECORDER

The Alcon AL-NVR5032-4D NVR is for the Smarter generation. It is a Enterprise NVR which supports up to 32ch IP camera input and recording. It Supports Smart Recording, Smart Search. It Supports any 3rd party OEM IP camera with ONVIF compliance. The Alcon Premium Series NVR also supports intelligent video analytics like Face Detection, People Counting and many other features

### Video Recording & Management

**High-Resolution Recording:** Supports HD, Full HD and even higher resolutions for detailed surveillance.

**Smart Recording:** Optimized recording based on motion detection, schedules, or events.

**Video Compression:** Efficient formats like H.264, H.265, or H.265+ reduce storage requirements without compromising quality.

**Customizable Recording Modes:** Continuous recording, Motion-based recording & Event-triggered recording

### Remote Access & Monitoring

**Mobile & Desktop Apps:** Provides live viewing and playback via smartphones, tablets, or PCs.

**Web Access:** Access video feeds via web browsers using IP addresses or dedicated portals.

**Multi-Site Monitoring:** Centralized viewing of feeds from multiple NVRs in different locations.

### Connectivity & Compatibility

**ONVIF Compliance:** Ensures compatibility with a wide range of IP cameras from different manufacturers.

### AI & Smart Analytics

**VCA:** Tripwire, Double Tripwire, Perimeter, Object Abandon, Object Lost, Loitering, Running, Parking, Crowded, People Counting, On Duty Detection, Video Abnormal, Audio Abnormal, Heatmap, Face Capture(Face Detection), Safety Helmet Detection, Human/Vehicle Classification

### Ease of Use

**Plug-and-Play Setup:** Simplifies installation with auto-camera detection.

**User-Friendly Interface:** Intuitive menus and graphical displays for configuration and monitoring.

**Firmware Updates:** Ensures up-to-date security and feature enhancements.

### Scalability

**Expandable Channels:** Easily add more cameras as surveillance needs grow.

**Integration with VMS:** Works with Video Management Software for enterprise-level solutions.

### Security & Alerts

**Encryption:** Protects video streams during transmission and storage.

**Multi-User Access Control:** Role-based permissions to restrict unauthorized access.

**Real-Time Alerts:** Notifications for motion, tampering, or system failures via email, SMS, or apps.



Hospital



Industries



Office




Apartment

## SPECIFICATION

Video and Audio		AL-NVR5032-4D
Access Channel		32
Incoming Bandwidth		160Mbps
Outgoing Bandwidth		48Mbps
Resolution		8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Decoding Capability		8MP(30fps)×2, 6MP(30fps)×2, 5MP(30fps)×3, 4MP(30fps)×4, 3MP(30fps)×5, 1080P(30fps)×8, 720P(30fps)×16, 4CIF(30fps)×32; *: The length or width of camera resolution (each track) cannot exceed 4096 pixels.
Playback Decoding Capability		8MP(30fps)×2, 6MP(30fps)×2, 5MP(30fps)×3, 4MP(30fps)×4, 3MP(30fps)×5, 1080P(30fps)×8, 720P(30fps)×16
Third-party Camera Access		ONVIF; RTSP
HDMI Output		HDMI: 1024×768(60Hz), (720P)1280×720(50Hz/60Hz), 1280×800(60Hz), 1440×900(60Hz), (1080P)1920×1080(50Hz/60Hz), (2K)2560×1440(30Hz), (4K)3840×2160(30Hz)
VGA Output		VGA: 1024×768(60Hz), (720P)1280×720(50Hz/60Hz), 1280×800(60Hz), 1440×900(60Hz), (1080P)1920×1080(50Hz/60Hz)
Multi-screen Display		Simultaneous Output: VGA: 1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/20C/20D/25/32/36 HDMI: 1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/20C/20D/25/32/36
Audio Input		1-ch, 3.5mm
Audio Output		1-ch, 3.5mm
Two-Way Audio		1-ch, 3.5mm, using the audio input
Compression		
Video		S+265; H.265; S+264; H.264
Audio		G711A; G711U; AAC; ADPCM_DIV4
Stream Type		Video; Video & Audio
Network		
Network Protocol		802.1X; ARP; DDNS; DHCP; DNS; Easy DDNS; FTP; HTTP; HTTPS; ICMP; IGMP; IPv4; IPv6; Multicast; NFS; NTP; PPPoE; RTCP; RTP; RTSP; SMB/CIFS; SMTP; SNMP v1/v2/v3; SRTP; SSH; SSL; TLSv1.2, TLSv1.3; TCP/IP; UDP; Unicast; UPnP
Mobile Phone Access		Android; iOS; P2P
System Compatibility		ONVIF(Profile S/T/G); RTSP; CGI; SDK
Web		IE10+; Firefox52+; Edge89+; Safari11+; Chrome57+
Record Playback		
Multi-channel Playback		16
Record Mode		Manual Recording; Alarm Recording; Schedule Recording
Storage Method		Local HDD
Backup		USB storage device, Network
Playback Function		Play/Pause/Stop/Slow /Speed/Backwards 30s/Forwards 30s/Full Screen/Backup (Video Editing)/Step/Digital Zoom
Alarm		
General Alarm		Motion Detection; Mask Alarm; Alarm Input(IPC)
Exceptions Alarm		Video Loss; IP Conflict; MAC Conflict; Network Disconnected; No Disk; Illegal Access; Disk group space alert; Disk Full; Disk R/W Error; Recording Abnormal; Abnormal found in smart of disk; Abnormal temperature of the disk; Hot-spare Exception; Voltage Alarm(IPC); RTC Failure
Intelligent Analytics		
AI by Camera		Tripwire; Double Tripwire; Perimeter; Object Abandon; Object Missing; Loiter; Running; Parking; Heatmap; Video Abnormal; Audio Abnormal; On Duty Detection; Crowd Detection; Safety Helmet Detection; People Counting; Link to Tracking; Smoke and Fire Detection; Environmental Temperature Measurement; Face Detection; Human Body Temperature Measurement; Smart Motion; Human/Vehicle Classification
VCA Search		Heatmap; Early-warning Search; Behavior Search; Thermographic Retrieval; Duty Search; Face Search
Face Detection		
Face Attributes		Gender; Age
Storage		
HDD Capacity		Up to 10 TB capacity for each HDD
Disk Group		4 Disk Group

External Port	
USB	1×USB2.0; 1×USB3.0
HDMI	1×HDMI(supports up to 4K resolution output)
VGA	1×VGA
Network Interface	2×RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
SATA	4×SATA interface
General	
UI Language	English; Spanish; Korean; Italian; Turkish; Russian; Thai; French; Polish; Dutch; Hebrew ; Arabic; Vietnamese; German; Ukrainian; Portuguese; Albanian
Power Supply	DC12V 5A
Power Consumption	<10W(HDD not included, idling)
NetWeight	3.1kg
GrossWeight	5.19kg
Boundary Dimensions	440(L)347(W)75(H)mm
Package Dimensions	540(L)175(W)455(H)mm
Operating Temperature	-10°C~+55°C (+14°F~+131°F)
Operating Humidity	10%~90%RH (non-condensing)
Storage Temperature	-20°C~+60°C (-4°F~+140°F)
Package Kit	Network Video Recorder; Screw Pack; Mouse; Power Adapter; European Standard Power Cord; 2×Ear Plate; 4×SATA Hard Disk Data Cable; 2×SATA Power Cord
Certification	CE, FCC,BIS & RoHS

## DIMENSIONS

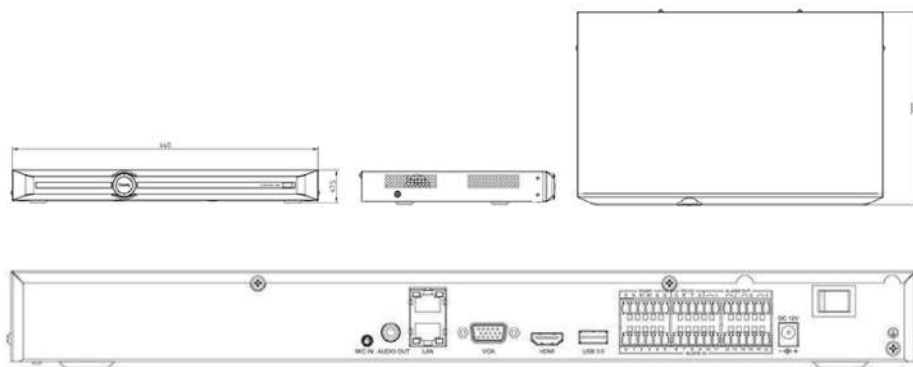

## ORDERING INFORMATION

AL-NVR5032-4D

32CH ENTERPRISE 4SATA NVR



\*Product specifications and availability are subject to change without notice.

